




# Auto ID (Barcode + RFID) & Mobile Workforce

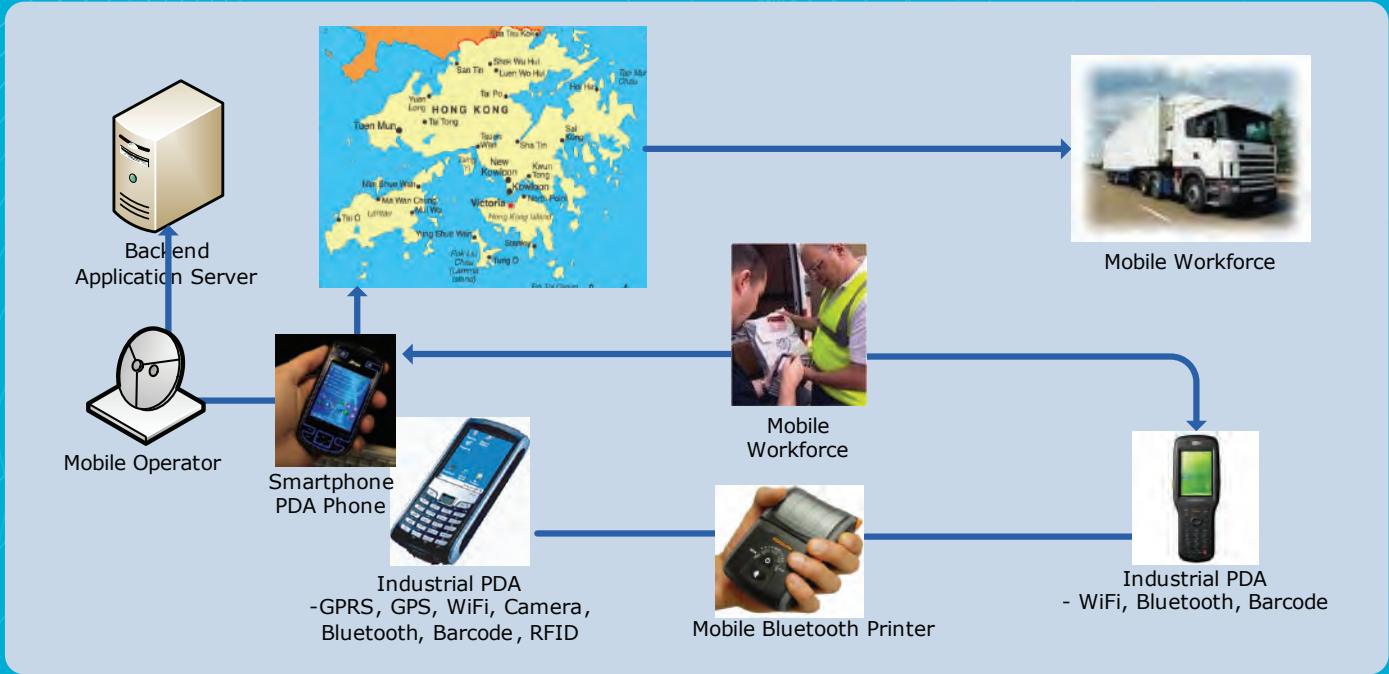

## Multi-functions Industrial PDA

- Microsoft Windows CE5.0
- Intel PXA 270, 530 MHz
- 128MB RAM/128 ROM
- 3.5" TFT LCD QVGA
- 24+1 Alphanumeric key
- I/O ports : USB Client, Serial
- 2D or 1D barcode scanner
- Weight: 380g with standard configuration
- 17.5cm L x 7.4cm W x 2.3cm H
- WLAN (802.11b/g), Bluetooth
- Lithium battery 3.7V, 4.4Ah
- 1.5 m drop to concrete
- GSM/GPRS and GPS
- Camera ( 1.3 M )
- RFID – HF(13.56MHz) or UHF EPC Gen 2
- Temperature: -20 C to 50 C (operating)



## Mobile Printer

- Direct Thermal
- Print speed: max. 80mm/sec
- Resolution: 203dpi (8 dot/mm)
- Easy paper loading
- Char size: Font A-12x24, Font B-9x24
- Barcodes: 1D & 2D
- Drivers: Win CE4.2, Win CE5.0
- Sensor : Paper end sensor
- Cutter type: Manual cutter
- Paper type: Thermal paper
- Connectivity : Bluetooth, USB
- Battery operation: 6.2 hrs for normal operation, 14 hrs for standby mode
- 81 mm x 127.4mm x 44.7mm
- Weight: 293g (Printer+battery+paper roll)



## Industrial PDA

- Microsoft Windows CE5.0
- Intel® X-Scale PXA255 400MHz
- 128MB RAM/128 ROM
- 3.5" TFT LCD QVGA (240x320) color with touch panel
- SD ( up to 4 GB )
- I/O ports : USB Client, Serial
- 1D barcode scanner
- Weight: 380 g with battery
- 200mm. L x 78mm. W x 28mm. H at grip: 64mm. W (2.51in.)
- WLAN (802.11b/g), Bluetooth
- Li-ion STD battery pack, 2000mAh
- IP64-Rated Sealing
- 1.5m free drop impact resistance
- Temperature:
  - 10° ~ 60°C (operating)
  - 30° ~ 70°C (storage)